



## HIGH HEAD SUMP PUMP

This Reefer Twin Impeller Sump Pump, is specifically designed for applications with longer pipe runs. Ideal for heavy duty high lift situations. Manufactured with an industrial grade motor with insulation Class F.



### Applications


- Dirty Water
- Bio-Cycles
- Grey Water
- Waste Water
- Water transfer
- Industrial Applications

### Features

- Non-clogging High Head twin impellor pump
- Solids Handling 8mm
- Liquid Temperatures 0°C to 40°C
- Thermal relay dual overload protection
- Robust particle screen

### Construction

- Gr 304 Stainless Steel Outer Casing
- Twin Cast Iron Vortex Impellers
- Insulation Class F induction Motor
- Dual mechanical seal in oil chamber
- MAC 3 float switch
- Stainless Steel particle screen

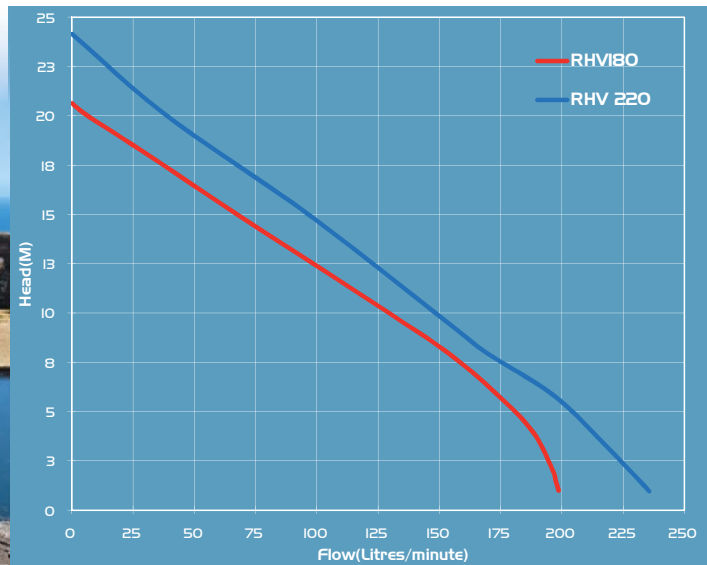

RAMDEX CODE	MODEL	POWER		RATED		MAXIMUM		SOLIDS HANDLING (mm)	CABLE LENGTH (METRES)	OUTLET		WEIGHT (KG)	SIZE (L x W x H (mm))
		AMPS	WATTS	FLOW (L/min)	HEAD (m)	FLOW (L/min)	HEAD (m)			mm	inch		
7709	RHV180	4	400	130	10	180	20	8	10	32	1 1/4	13	227 x 160 x 370
7716	RHV220	6	750	130	15	220	25	8	10	40	1 1/2	15	240 x 170 x 390